
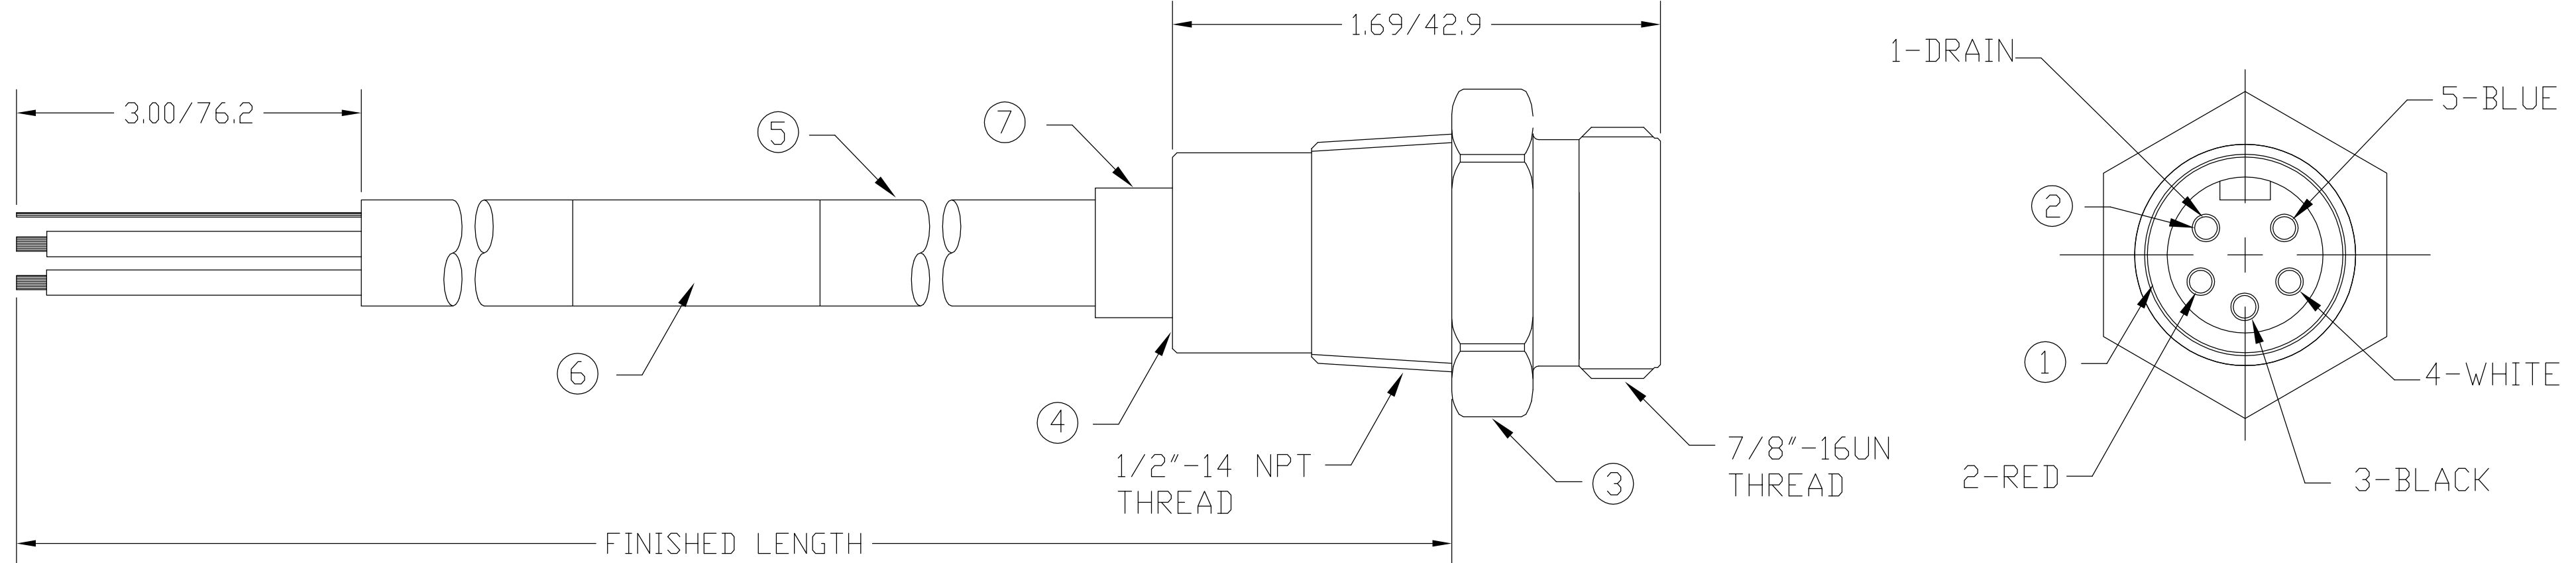


MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
130039-0296	DN5100-M003	.98' +.75" -0 [.3M +19.1 -0]
130039-0297	DN5100-M005	1.64' +1.75" -0 [.5M +44.5 -0]
130039-0298	DN5100-M006	1.97' +1.75" -0 [.6M +44.5 -0]
130039-0299	DN5100-M010	3.28' +2.19" -0 [1.0M +55.6 -0]
130039-0074	DN5100-M015	4.92' +2.19" -0 [1.5M +55.6 -0]
130039-0300	DN5100-M020	6.56' +3.50" -0 [2.0M +88.9 -0]
130039-0301	DN5100-M030	9.84' +3.50" -0 [3.0M +88.9 -0]
130039-0302	DN5100-M040	13.12' +6.50" -0 [4.0M +165.1 -0]
130039-0303	DN5100-M050	16.40' +6.50" -0 [5.0M +165.1 -0]
130039-0304	DN5100-M060	19.69' +6.50" -0 [6.0M +165.1 -0]

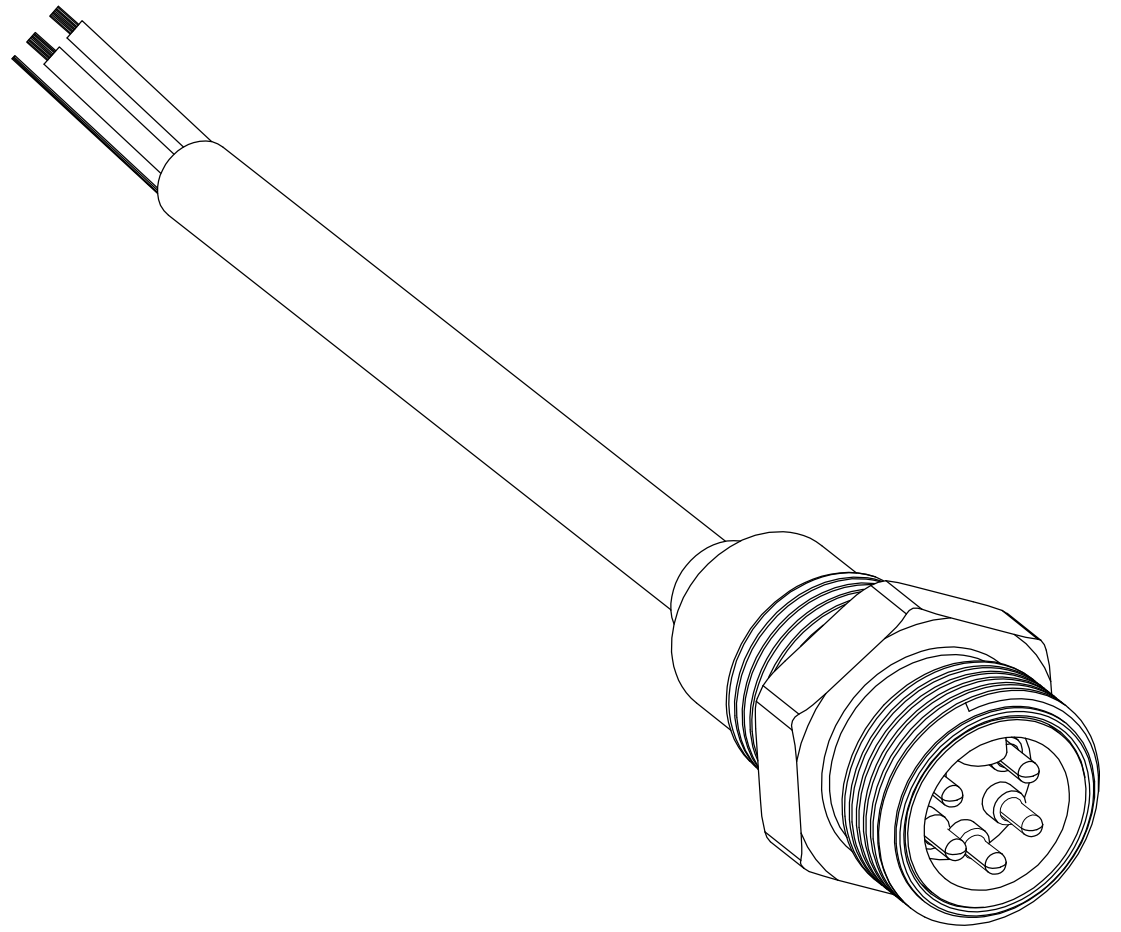

VOLTAGE RATING	300 VAC/VDC
AMPERAGE RATING	8 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C
UL CERTIFICATIONS	UL LISTED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	PVC	GRAY
2	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
3	RECEPTACLE SHELL	ALUMINUM	GRAY ANODIZED
4	POTTING MATERIAL	EPOXY	BLACK
5	CABLE-DEVICENET THICK CABLE 2/15 & 2/18 SHIELD PAIR	PVC	GRAY
6	LABEL	MYLAR	BLACK/YELLOW
7	HEAT SHRINK TUBING	POLYOLEFIN	BLACK

RLSD DRAWING  
 EC NO: WNA2009-0576  
 DRWN: BWOODMAN 3/12/09  
 CH'KD: JM  
 APPR: JFMURPHY 2009/03/31  
 A REV

QUALITY SYMBOL  
 ▽=0  
 ▽=0  
 GENERAL TOLERANCES (UNLESS SPECIFIED)  
 4 PLACES ±---  
 3 PLACES ±---  
 2 PLACES ±--- ±.01  
 1 PLACE ±0.3 ±---  
 ANGULAR ±---°  
 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE IN/MM  
 DRAWN BY DATE  
 BW 2009/03/12  
 CHECKED BY DATE  
 KJ 2009/03/12  
 APPROVED BY DATE  
 MATERIAL NO. SEE CHART  
 SIZE C

SCALE ---  
 DESIGN UNITS ---  
 THIRD ANGLE PROJECTION  
 TITLE MINI 5P MALE RECEPTACLE DEVICENET  
 MOLEX INCORPORATED  
 DOCUMENT NO. SD-130039-001  
 SHEET NO. 1 OF 1  
 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION