

## SUMMARY

### # Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	Mixed coaxial/ Multi coax
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	CLB.810.GLL1G
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	CA*: Straight plug with cable collet
Keying	
Housing Material	PSU (Polysulfone), gray
Cable Fixing	∅ 0 - 0 mm
Variant	

### Performance

Configuration	CAB.810 : 1 Coax (50 Ohm), 10 Low V.
Insulator	
Rated Current	5 Amps

### Specifications

Test voltage (kV rms) Contact-contact:	1.25
Air clearance min. (mm) or Creepage distance min. (mm):	0.9


### Others

IP Rating:	50
------------	----

---

## DRAWINGS

### Draws

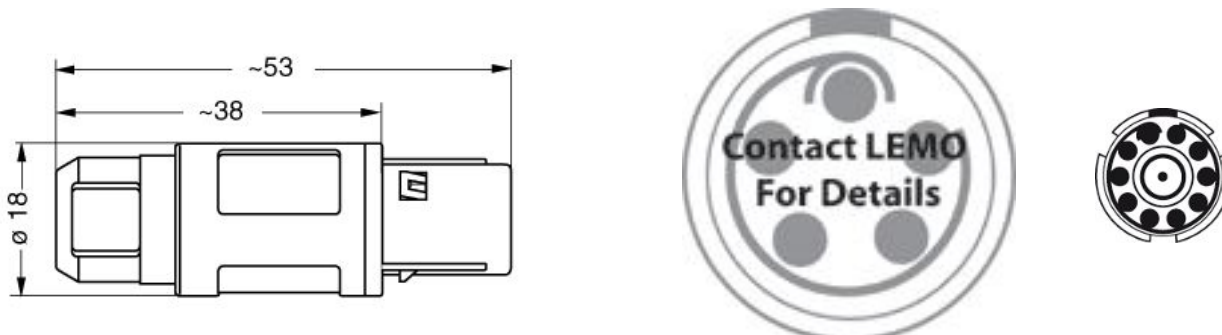

### Dimensions

	A	L
mm.	18	53
in.	0,71	2,09

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables