


5 4 3 2 1



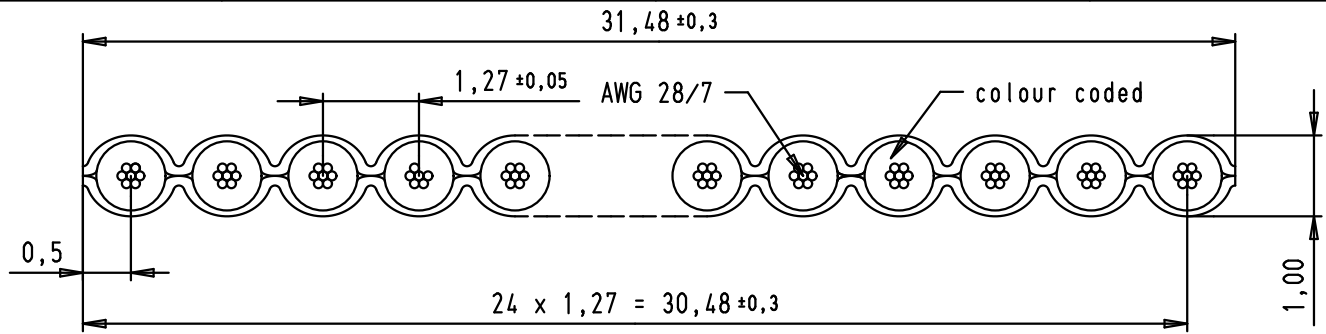

Wire _____ Cu tinned
 Gauge _____ AWG 28/7
 Voltage rating _____ 300 Vr.m.s
 Current (Max) _____ 2,1A
 Conductor resistance _____ 221 mΩ/m
 Capacity unbalanced _____ 42,7 pF/m
 Impedance unbalanced _____ 105 Ω
 Inductance unbalanced _____ 0,68 μH/m
 Signal delay _____ 4,9 ns/m
 Insulation material _____ PVC
 Temperature rating _____ -20°C (operating) to 105°C
 _____ -30°C (static)
 Flammability rating _____ UL: VW1
 Insulation resistance _____ 100 MΩ/km
 Approval _____ UL AWM style 2651

Colour code sequence (in 10 steps):

- brown
- red
- orange
- yellow
- green
- blue
- violet
- grey
- white
- black

A

| | | | | | | | | |
|---------|----------|------|-------------------------------|----------|------|---|---|-------------------|
| | | | | Dot. | Name |  All Dim. in mm Orig. Size DIN A 4 | SEK 18 Flat cable | Maßstab/ Scale |
| | | | Detail. | 20/10/05 | JMDR | | 25 poles, length per reel: 30,48 m colour coded, UL 20130, IEC 918 | 10:1 |
| | | | Insp. | | | | | |
| EC01446 | 12/02/10 | SC | Stand. | | | | | |
| | | | | | |  | TB 09 18 025 7005 | Blatt/ Page |
| 33990 | 14/05/07 | PK | HARTING EURL F-95972 Paris | | | | | 1 / 1 |
| 33246 | 20/10/05 | JMDR | | | | | | |
| Mod. | Dot. | Name | | | | | Sub. | |