

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

REVISIONS

© COPYRIGHT - TE Connectivity Ltd.

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
D		ECR-18-000229	10JAN2018	GCM	JL

CABLE LIYY 4x0,34mm  
(INSULATION DIAMETER 4.9±0.1mm)


N°4 RECEPTACLE CONTACTS  
P/N 166051-1

**MOUNTING OVERVIEW**

CONTACTS MUST BE MOUNTED ON THE POSITIONER BEFORE TO INSERT THEM INTO THE HOUSING. MOUNTING SHALL BE ACCORDING TO THE TYCO ELECTRONICS APPLICATION SPEC. 114-20147.

**ASSEMBLED CONNECTOR**

VOLTAGE: < 30V r.m.s. (42V PEAK)  
MAXIMUM CURRENT: 2A PER WAY (FULL LOADED)

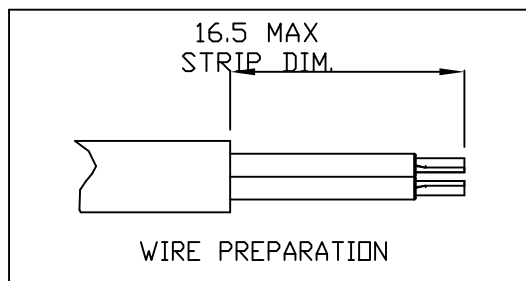

POSITIONER  
P/N 293410-1


RECEPTACLE HOUSING  
P/N 293408-...

THE PRESENTED PRODUCT / DESIGN WILL BE RELEASED FOR THE MANUFACTURING OF THE NECESSARY PRODUCTION TOOLS HEREBY. FURTHER CHANGES HAS TO BE PAID BY CUSTOMER.

DATE, SIGN OF THE CUSTOMER

RECEPTACLE HOUSING (N° 3 VERSIONS):  
- P/N 293408-1 (REV. B) IN WHITE COLOUR  
- P/N 293408-2 (REV. B) IN BLACK COLOUR  
- P/N 293408-3 (REV. B) IN GRAY COLOUR


PACKAGING: N° 1500 PCS INTO CARTON BOX, ACCORDING TO PACKAGING SPEC. 107-20289.

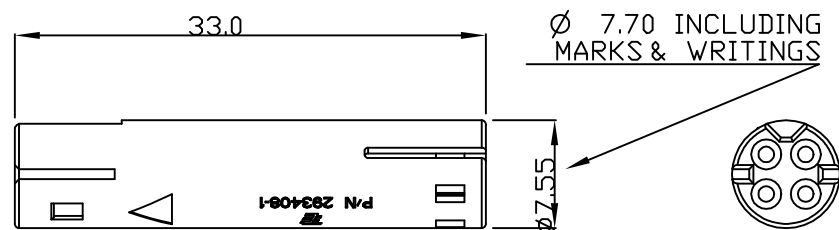

KEYING POLARIZATION FOR  
P/N 293408-1 (WHITE VERSIONS)  
AND FOR  
P/N 293408-2 (BLACK VERSIONS)

KEYING POLARIZATION FOR  
P/N 293408-3 (GRAY VERSIONS)

POSITIONER (N°1 VERSION):  
- P/N 293410-1 (REV. B) IN BLACK COLOUR

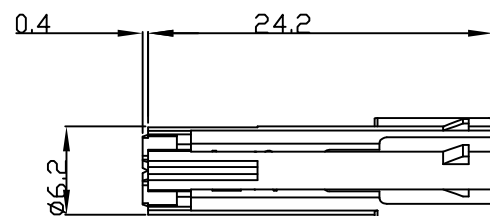

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -

MATERIAL  
FINISH  
PLASTIC PARTS: PA  
ACC. TO GLOW WIRE 750°C NO FLAME

DWN	12SEP2008
D.CHIARELLI	
CHK	12SEP2008
D.CHIARELLI	
APVD	12SEP2008
G.TURCO	
PRODUCT SPEC	108-20293
APPLICATION SPEC	114-20147
WEIGHT	-
CUSTOMER DRAWING	

**STE** TE Connectivity Ltd.

NAME			
4 POS. LOW VOLTAGE FREE HANGING, FEMALE CONNECTOR FOR EUROPE MARKET			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=293411	-
SCALE	SHEET	REV	
1:1	1 OF 1	D	