

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: X100WCOLOR  
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6. AVAILABLE IN TEN COLORS.

CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM.

SPRING: STAINLESS STEEL TYPE 302.


2. P/N: 9302COLOR  
HOUSING: MOLDED NYLON 6,6. AVAILABLE IN TEN COLORS.

FRAME: BRASS, NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

HARDWARE: STAINLESS STEEL NUT, BRASS EYELET, COPPER, TIN PLATED TERMINAL RING.

3. P/N: W-600/COLOR  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

4. PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: 5000 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

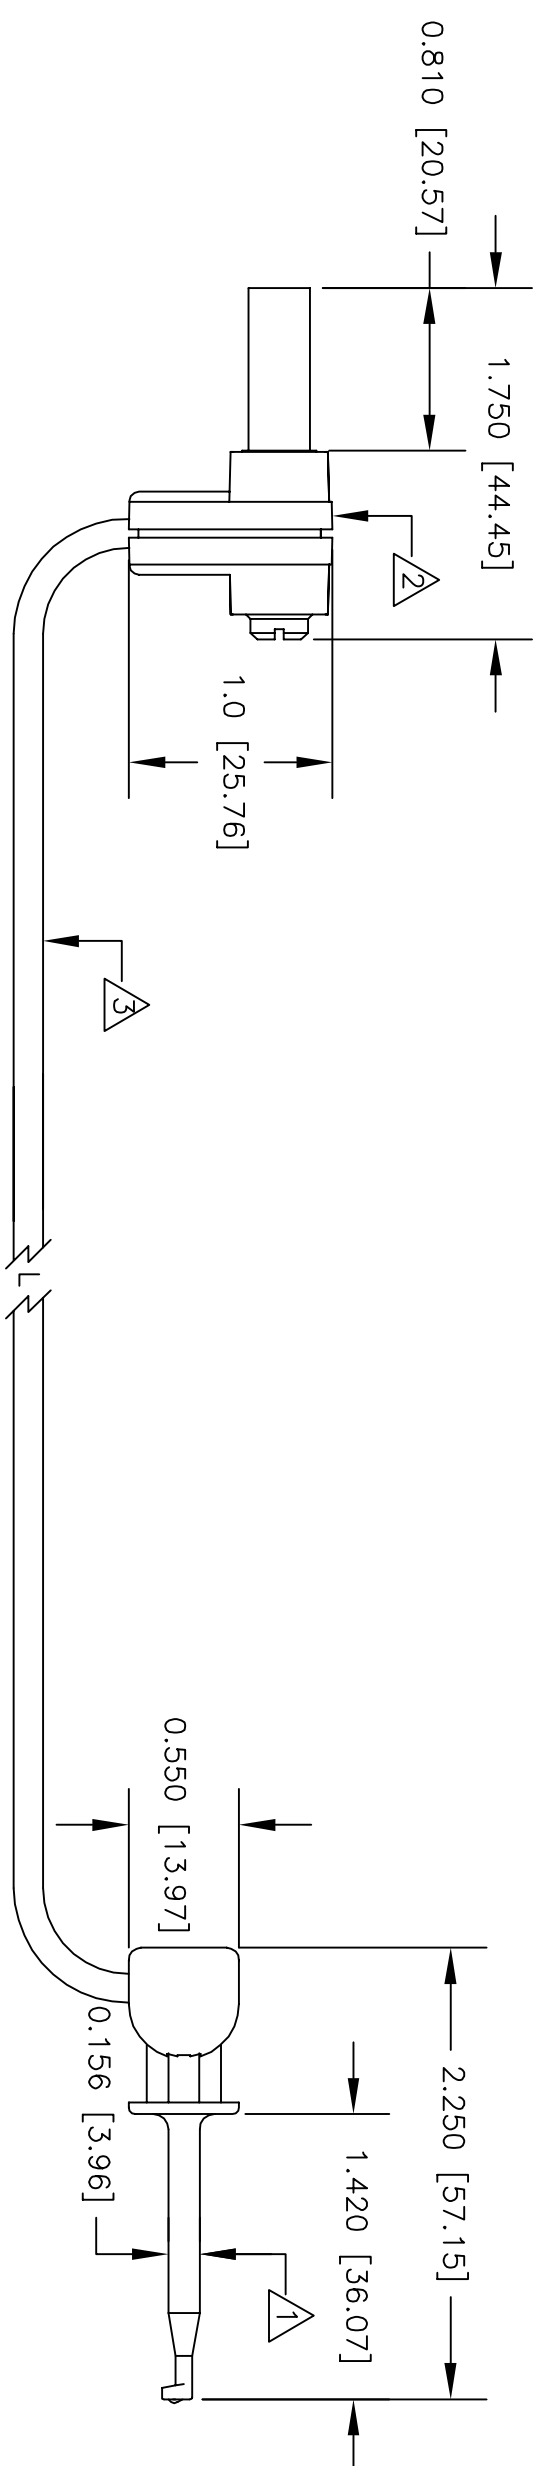

REVISIONS		DATE	APPROVED
LTR			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
± .XX ±	± .XXX ±	APPROVALS	DATE
±	±	R.L	10/10
MATERIAL SEE NOTE.		APPROVED BY	
FINISH SEE NOTE.			
NEXT ASSY USED ON			
APPLICATION		DO NOT SCALE DRAWING	

**EZ-HOOK** DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.

DESCRIPTION: MINI-HOOK (X100W) TO SHRD R/A BAN PLG (9302)

SIZE CODE IDENT NO. DRAWING NO. REV. B 08505 633W

SCALE 1:1 SHEET 1 OF 1