図面番号(DRAWING NO.) SJ100824

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.

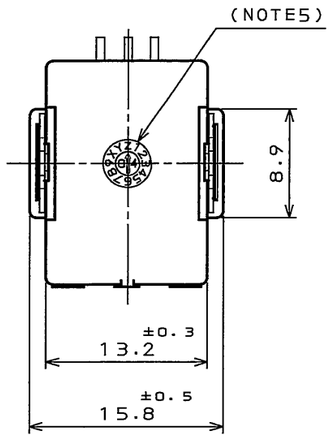

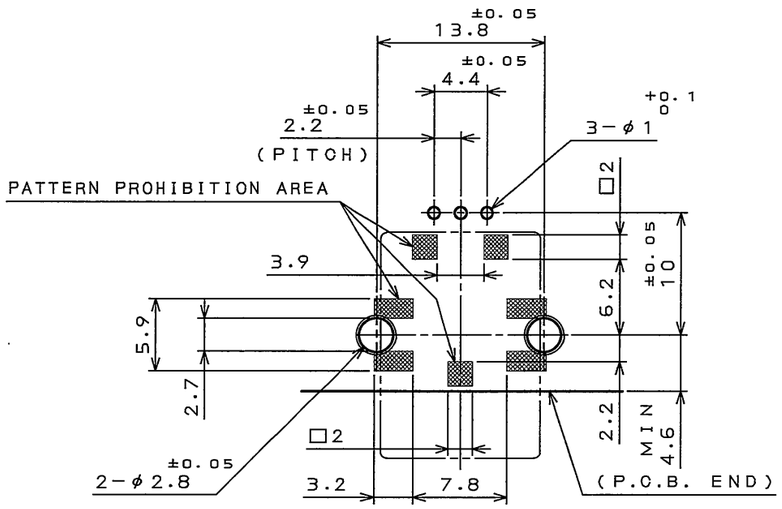

APPLICABLE P.C.B. HOLE LOCATION(REF.)

(NOTE6 & SEE TABLE1)

SECT. A-A

(SCALE 5:1)

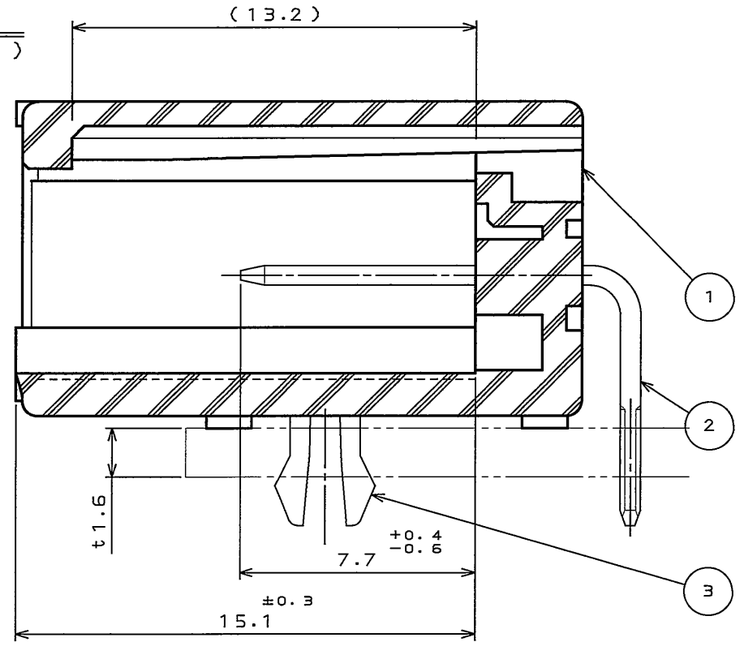



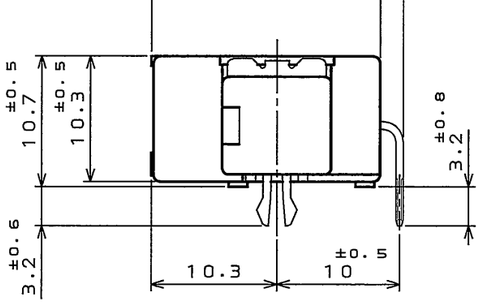

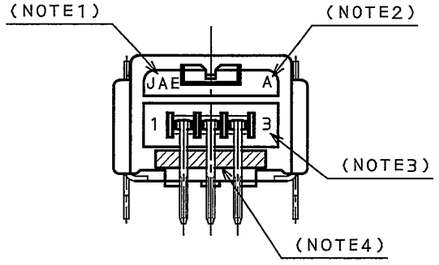

TABLE1: APPLICABLE P.C.B. SPECIFICATION

APPLICABLE P.C.B. THICKNESS 適合基板厚	t1.6 +0.2 -0.1
FINISHED HOLE DIA. 仕上径	HOOK PIN HOLE: φ2.8 ±0.05 (LAND DIA.:φ3.3) (THROUGH HOLE PLATED)
	TERMINAL HOLE: φ1 +0.1 0
P.C.B. MATERIAL 基板材質	FIBERGLASS EPOXY COMPOSITE P.C.B. ガラス布入りエポキシ積層板

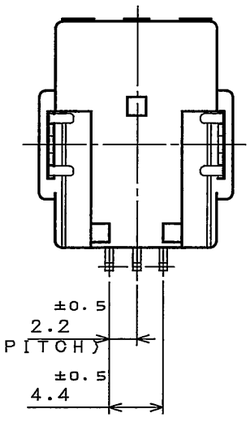

NOTE1. COMPANY LOGO "JAE" APPEARS IN RAISED LETTERS.
2. MOLD CAVITY DESIGNATOR APPEARS IN RAISED LETTERS.
3. POSITION NO. APPEARS IN RAISED LETTERS.
4. MATERIAL MARK "〉SPS GF30〈" APPEARS IN RAISED LETTERS IN THIS ▨ HACHING AREA.
5. LOT NO. APPEARS IN RAISED LETTERS.
6. PLEASE SOLDER THE HOOK-PINS FOR CONNECTOR HOLDING.

注1. 社標を浮き出す.
2. 金型マークを浮き出す.
3. 端子No.を浮き出す.
4. ▨ 部に材料マーク"〉SPS GF30〈"を浮き出す.
5. ロットNo.を浮き出す.
6. コネクタ保持の為に、フックピンもソルダリングして下さい.

NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
3	HOOK PIN	2	COPPER ALLOY	PLATING:Sn	———
2	CONTACT	3	BRASS	PLATING:Sn	———
1	INSULATOR	1	SPS GF 30	———	COLOR:GRAY

仕様書(SPECIFICATION) JACS-1754 JAHL-1754	第1版(ORIGINAL DATE) 3.Dec.2004	尺度(SCALE) 2:1	シリーズ(SERIES) MX34
一般公差(GENERAL TOLERANCE) 寸法(DIMENSION): . ±0.8, .X ±0.4, .XX ±0.1, .XXX± / 角度(ANGLES): X° ±, X°X'±	製図 DR.	名称(TITLE) MX34003NF1 ANGLE PINHEADER	日本航空電子工業株式会社 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
	担当 CHK. S.HARA		
	査閲 APPD. —		
	承認 APPD. T. Ishiwata	質量(MASS)	図面番号(DRAWING NO.) SJ100824
			版数 (REV.) 1

SIZE A3

DOF-0-212E(03.08)

JAE-CONNECTOR.COM Reference Only

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT (C) 2004, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.