


REV	ECN	APP'D
-	6588	<i>JVT 9/28/10</i>

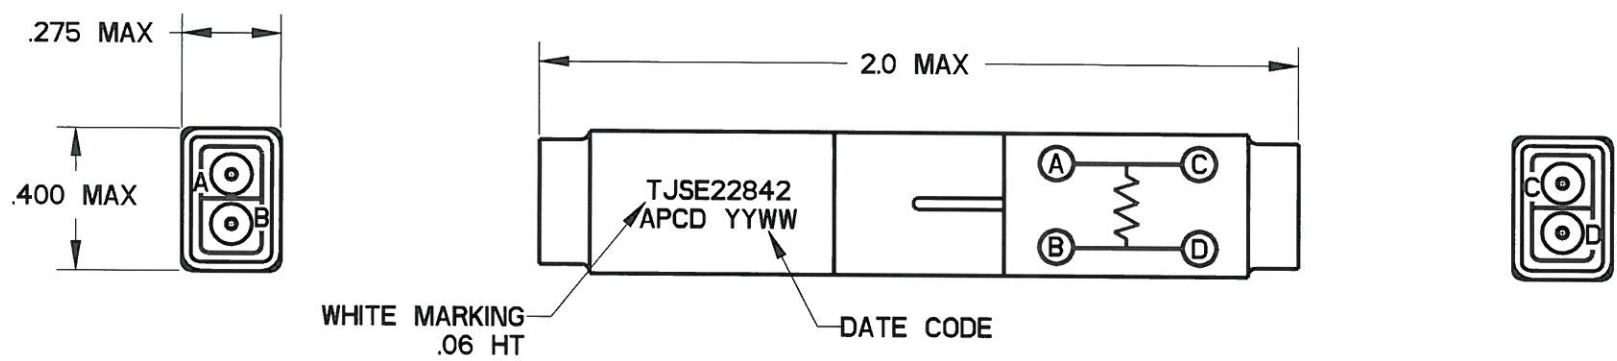

- NOTES:
- MATERIALS:  
 HOUSING: POLYETHERIMIDE, COLOR BLACK  
 GROMMET: SILICONE ELASTOMER, COLOR BLUE  
 INTERNAL CONTACT: COPPER ALLOY, GOLD PLATED,  
 PER MIL-DTL-45204, TYPE I, GRADE C, CLASS I  
 50 MICROINCH MIN. OVER NICKEL PER SAE-AMS-QQ-N-290,  
 CLASS 1, 50/30 MICROINCH MIN.  
 CONTACT RETAINER: STAINLESS STEEL
  - SPLICE ACCEPTS (4) MATING M39029/1-100 CONTACTS (INCLUDED)
  - PART COMPLIES TO ALL REQUIREMENTS PER SAE-AS8174.
  - RESISTOR: 47.5Ω, 1/8W, ±1%, RLR05C47R5FS

<b>DIMENSIONS</b> ANSI Y14.5M UNITS: INCHES Pro/E FILE	<b>TOLERANCES</b> .XX ±0.01 .XXX ±0.005 ANGLES ±2.0°	<b>PROJECTION</b> 	<b>Amphenol Pcd</b> SPECIFICATION DRAWING		<b>TITLE</b> WIRE SPLICE, ELECTRONIC RESISTOR, 47.5Ω, 1/8W, 1% SIZE 22		
			ENGR M. DiGIACOMO 09/07/10		SIZE <b>A</b>	DWG NO. <b>TJSE22842_C</b>	REV -
<b>ORIGINAL</b> 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA		CHKD <i>R. Newman 9/28/10</i>	APPD <i>JVT 9/28/10</i>	CODE: 58982	SCALE: 2:1	SHEET 1 OF 1