


Extended length is with 500g of force

**Material:**

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X43): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

**Electrical:**

- Voltage rating: 30V (DC)

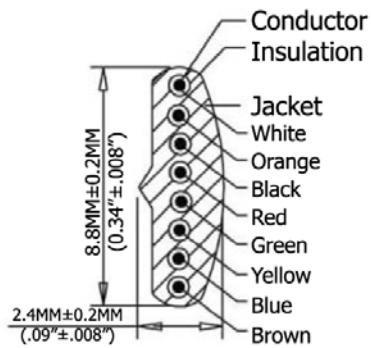

SBC: A-A

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches	28.0 Inches
1,524.0MM-1,752.6MM	711.2MM

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.21.11	<b>AT-K-C-26-8-W/5</b>
X.X	±0.40				Approved		
X.XX	±0.25						Title
X.XXX	±0.15						NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Pre-Cut, 5 Ft., White
Angle	±3°						Drawing No.
							<b>rev00</b>
							Replace
							Sheet
		Modification	Date	Name	