


CAP:
1RBLK
(Q800300)



NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50mA @ 50VDC
- ▲ 5. OPERATING FORCE: 160±50 gms
6. TRAVEL: 0.25+0.20/-0.10 mm
7. CONTACT RESISTANCE: 100 MILLI-OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 100,000 CYCLES MIN.
- ▲ 9. CONTACT MATERIAL: GOLD
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT.

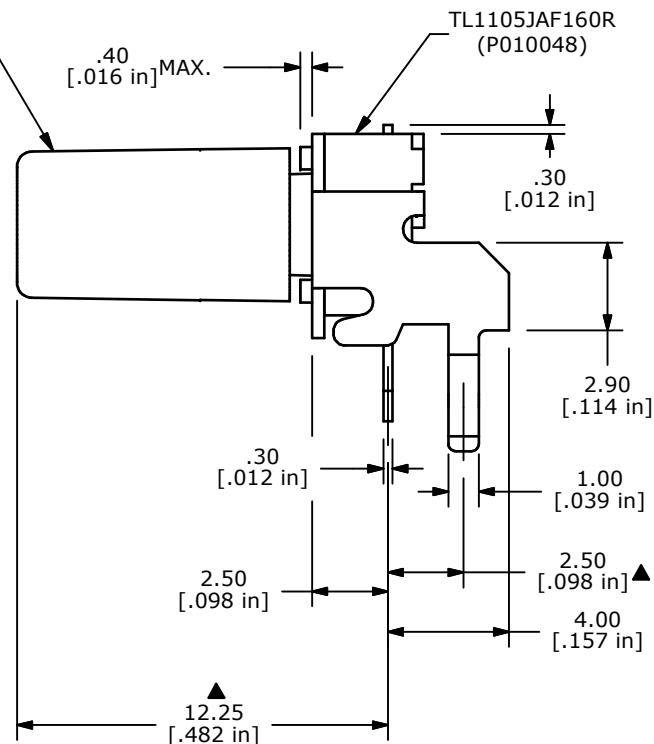

A	17681	RELEASED FOR PRODUCTION	9/20/07	BF
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE TL1105JAF160R1RBLK				
SCALE	DATE	DR	DWG	REV
4:1	9/20/2007	BF	XP0302A	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED